


	DESCRIPTION	STOCK NO.	RANGE	ACCURACY
	Clemtex Needle Pressure Gauge NPG-100 Determines blast cleaning pressure at the nozzle.	20903020	0-100 PSI	±5%
	Clemtex Nozzle Orifice Gauge P-BAG Measures air consumption (CFM@ 100 PSI) of abrasive blasting nozzle	20903021	1/4-5/8 in. 81-545CFM	Actual
	Clemtex Inspection Mirror	20903022		

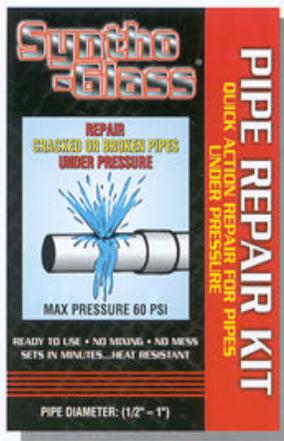


Syntho-Glass Steel Repair Tape

Designed for applications repairing cracked or broken pipes, under pressure of up to 60 psi and 4" in diameter. No need to take your system out of service. Permanent or temporary repairs can be made quickly and cost effectively. Each kit consists of Syntho-Glass, fiberglass cloth impregnated with a water activated resin and a special rubber tape, with pressure sensitive adhesive used for immediately stopping the leak.

Available in several sizes:

Kit Size	Pipe Size			
2" x 5'	1/2" to 1"	20903201	n/a	n/a
3" x 9'	1 1/4" to 2"	20903202	n/a	n/a
4" x 15'	2 1/2" to 4"	20903203	n/a	n/a
4" x 20'		20903204	n/a	n/a
4" x 30'		20903205	n/a	n/a
4" x 50'		20903206	n/a	n/a

**Syntho-Shield Petrolatum
Tape and Glass Kit**

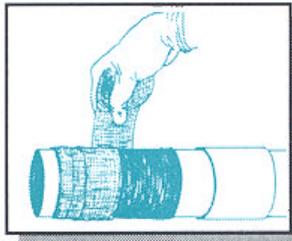

An innovative system that offers exceptional mechanical and impact strength for under water, under ground and above ground corrosion protection coating applications. Resistant to temperature extremes, easy to apply, resistant to water, acids, salts or soil organics. Minimal surface preparation required. Each kit contains:

- 4" x 33' roll of petrolatum tape
- 4" x 50' roll of Syntho-Glass

	DESCRIPTION	STOCK NO.	RANGE	ACCURACY	
	Syntho-Shield Epoxy Putty A two-part steel reinforced epoxy putty that cures in minutes to repair most anything made of metal, masonry, wood, ceramic, glass and many plastics. A roll of Syntho-Steel contains a steel reinforced epoxy resin and a special hardening agent which, when combined, will cure in 20 minutes to become as hard as steel. Repairs leaking water pipes, stops leaks in oil and water tanks, plugs holes and seals seams in air ducts. It contains no solvents, is non-toxic and easily prepared for application. Will not drip or sag and will set on wet surfaces. Available in two sizes:	2 oz. tube	20903208	n/a	n/a
		4 oz. tube	20903209	n/a	n/a
	Syntho-Steel Epoxy Mastic A two-part steel reinforced, non-sagging, formulation with a pot life of approximately 1 hour. Cures overnight, designed for repairing and sealing large anomalies, surface imperfections, leaking joints, pipes and fittings on large diameter piping. Ideal as a reinforcement metal filler on pipelines with wall loss abnormalities, caused by corrosion and erosion. Available in two pre-weighed kit sizes:				
		8 oz. kit	20903210	n/a	n/a
		16 oz. kit	20903211	n/a	n/a
Syntho-SubSea Epoxy Two component, 100% solids, Kevlar* reinforced, epoxy mastic coating for sealing and repairing leaks in pipelines and for corrosion and erosion protection in the splash zone or tidal areas. Used as a grout and adhesive mortar on bridges, piers and offshore platforms. Protective corrosion coating in splash zone and tidal prone areas. Pipeline anomaly reinforcement and remediation. Available in two kit sizes:					
		8 oz. kit	20903212	n/a	n/a
		16 oz. kit	20903213	n/a	n/a

For pricing, availability and order placement, please call our

**Instrument Hotline
1-800-422-RUST (7878)**

